

CONDUCTIVITY PROBE

EC Probe CK-10



Field Application:

- Waste water
- Drinking Water
- Cooling Towers
- Irrigation


Features

- Cell Constant: - 0,1 cm⁻¹ or K=10
- Body material PVC 60°C
- Stainless steel 316L electrodes
- Mechanical Connection: 1/2 Gas M Pvc

TECHNICAL CHARACTERISTICS

Measurement range:	0,1÷500µS
Constant [C-K]:	C=0,1 cm-1 K=10cm
Temp. Range:	60° C
Pressure Range:	6(*) bar
Body material:	PP-AISI 316
Mounting Process:	1/2" G.M.
Cable:	5 m

DIMENSIONS

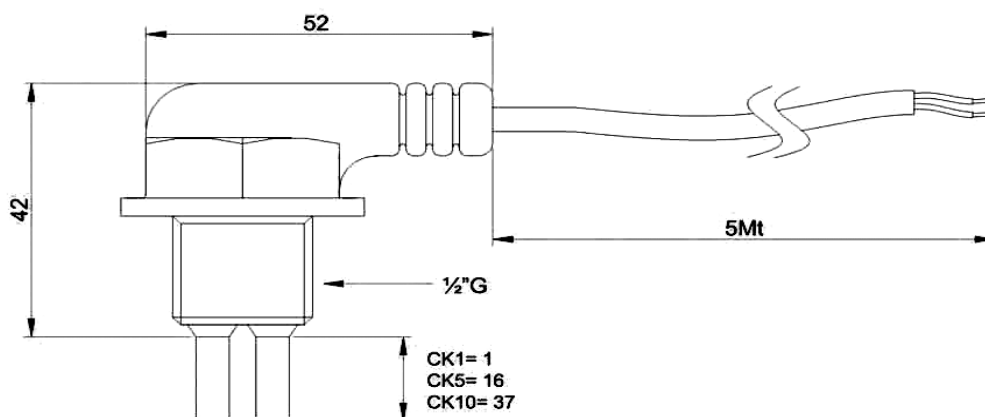

(*)The maximum pressure of 6 bars is guaranteed at 25 °C. As the temperature increases, the pressure decreases linearly and at 50° or 80 °C, the maximum pressure is 1 bar.

Technical data can be changed without notice.
EC Probe C-K10-R2